

# LINEAR PLATES



*Marking our mark*



# LINEAR PLATES



## TECHNICAL

### CHARACTERISTICS

	PVL 171	PVL 180	PVL 1400
Centrifugal force	13 kN	18 kN	17 kN
Vibration frequency	90 Hz	90 Hz	97 Hz
Working speed depending on ground	1,62 km/h	1,62 km/h	1,5 km/h
Plate width	400 mm	450 mm	400 mm
Compacting efficiency depending on ground	648 m <sup>2</sup> /h	729 m <sup>2</sup> /h	750/900 m <sup>2</sup> /h
Compacting depth up to	25 cm	25 cm	25 cm
Gradeability up to	30%	30%	30%

### ENGINE

	Honda 4-stroke	Hatz 4-stroke	Robin H-stroke
Model	GX 120	GX 160	EH 17 D
Power	2,9 kw (4 CV)	4 kw (5,5 CV)	2,9 kw (4 CV)
Frequency	3 600 r.p.m.	3 600 r.p.m.	3 600 r.p.m.
Fuel consumption	1 l/h	1 l/h	1 l/h
Tank capacity	3,6 l.	3,6 l.	3,6 l.

### DIMENSIONS


Height without pole	475 mm	475 mm	475 mm
Plate length	640 mm	640 mm	635 mm
Total approx. working length	1 340 mm	1 340 mm	1 220 mm
Approx. mass	72 kg	80 kg	125 kg

### SETRA / LCPC CLASSIFICATION

PQ 1

PQ 1

PQ 1

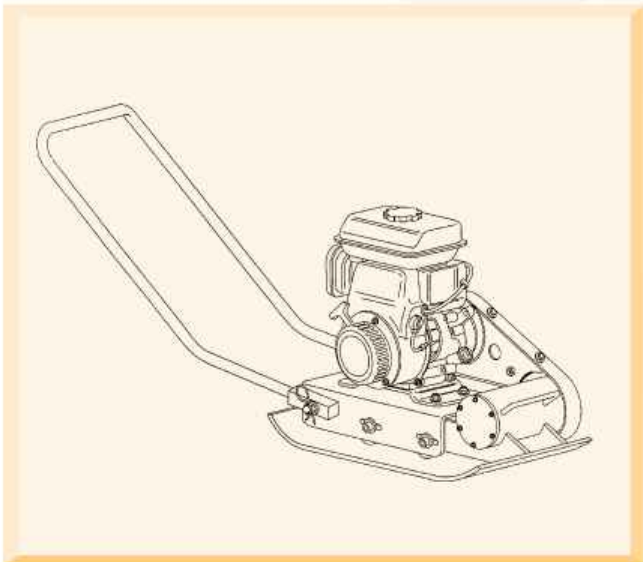

## GENERAL CHARACTERISTICS

- LATEST GENERATION OF PETROL ENGINES
- ABRASIVE RESISTANT BASE PLATE
- SINGLE LIFTING POINT
- EASY TO HANDLE
- GREAT EFFICIENCY IN DIFFERENT JOBS

## OPTIONAL

- SPRINKLER SYSTEM FOR HOTMIX
- POLYURETHANE BASE FOR CLAY PAVING STONES
- TRANSPORTATION WHEELS IN MODEL 1400



Dealer:

### OFFICE AND CENTRAL FACTORY

COMOPLESA - LEBRERO, S.A.

Avda. Alcalde Caballero, nº 32 • Pol. Industrial «El Pilar»  
50014 Zaragoza (Spain)

E/P.O. Box 402 • Tel (+34) 976 464 300 • Fax (+34) 976 464 301  
<http://www.lebrero.com> • E-mail: [info@lebrero.com](mailto:info@lebrero.com)